



SDD

Single Denomination Dispenser


The compact and secure mechanism for self-service automation



OEM...Driving profits in your ATM

SDD

Single Denomination Dispenser




The **SDD** Single Denomination Dispenser is an ultra compact, secure, cash dispensing mechanism, available in four variants - front or rear service and standard and short builds. The short variant is the world's smallest secure dispensing mechanism.

The **SDD** offers a market leading combination of high performance, compact size and low cost of ownership with no planned maintenance.

The **SDD** features secure, tamper indicating feed cassettes with an integral reject note compartment and cassette low indication.

The **SDD** is designed in accordance with the recommendations of leading international Standards Organisations to allow for final approval when installed in complete systems.

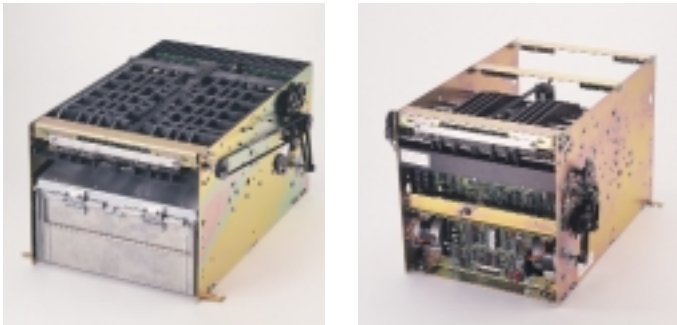

Technical Specification

Media capability

The SDD will handle the following size and thickness ranges:
Width: 57mm to 98mm
Length: 110mm to 192mm

Cassette capacity

Standard options: 1650-2150
Short options: 700-900
depending on thickness and quality

Weight (without notes)

1700 Standard SDD	8.5kg
1701 Short SDD	7.0kg
1702 Rear Service SDD	10.0kg
1702 Short Rear Service SDD	8.8kg

Environment

Temperature: 5°C – 50°C, 41°F – 122°F
Relative humidity: 10% to 90% non-condensing

Electrical Interface

RS232C, RS485, TTL Parallel or serial with polling or handshake control, all provided as standard


Power supply requirements

The SDD operates from a DC-only supply and requires the following power levels:
5 VDC \pm 0.2 V, 1.5A
36 VDC \pm 2V average, 5A peak
Power supply units are available from De La Rue as an option

Loading Frame

The loading frame must be used to open the cassette and also ensures correct loading of documents.


Dimensions




SDD1700 - Front Delivery, standard



SDD1701 - Front Delivery, short



SDD1702 - Rear Delivery, standard



SDD1703 - Rear Delivery, short



This leaflet is for general guidance only. De La Rue International Limited is pleased to give detailed specifications of its products in this leaflet. As the Company's products and services are continually being developed it is important for customers to check that the information contained herein includes the latest particulars. This document is not part of a contract or licence save insofar as may be expressly agreed.

DE LA RUE CASH SYSTEMS

Walton Road, Farlington
Portsmouth
PO6 1TJ
England

Tel: +44 (0)23 9238 3161
Fax: +44 (0)23 9231 8705
E-mail: oem.sales@uk.delarue.com
www.delarue.com

DE LA RUE CASH SYSTEMS

Taljavajem 8
S-642 84 Flen
Sweden

Tel: +46 1 576 5500
Fax: +46 1 571 5175



DeLaRue